

800Watts Single Output with Active PFC



■ Features:

- ➤ Universal AC input (90~264Vac)
- ➤ Built-in active PFC function, PF>0.96
- > Using ZVS technology to reduce power dissipation
- > Output protection: OVP/OLP/SCP/OPP/OTP
- Built in Fan speed control
- ➤ Built in AC inrush current limiting circuit(<20A)
- Build in constant current limiting circuit
- > Built in Remote Sense Function
- > Build in DC-OK / remote sense signal
- ➤ Wide operating ambient temperature (-30 °C ~70 °C)
- PCB with conformal coating
- ➤ 1 U low profile,41mm
- 3 years warranty

MODEL		PDF-800-24	PDF-800-36	PDF-800-48	
ОИТРИТ	DC Output	24V	36V	48V	
	Rated Current	33A	22A	16.5A	
	Ripple and Noise Note 2	≤200mV	≤200mV	≤200mV	
	Voltage ADJ. Range	21.6~26.4V	32.4~39.6V	43.2~52.8V	
	Voltage Accuracy	±2%			
	Line Regulation	±0.5%			
	Load Regulation	±2%			
	Set-up Time	≤3S (220Vac input, Full load)			
	Hold up Time	≥8mS (220Vac input, Full load)			
	Temperature Coefficient	±0.03%/℃			
	Overshoot and Undershoot	<5.0%			
	Voltage Range	90Vac~264Vac			
	Frequency Range	47Hz63Hz			
	Power Factor(Typical)	PF≥0.96/230VAC PF≥0.	98/115VAC Full Load		
INPUT	Efficiency (Typical)	≥89%	≥89%	≥89%	
	AC Current (max.)	≤12 A			
	Inrush Current (Typical)	≤20A @220Vac Cold start			
	Leakage Current	Input—output: ≤0.25mA Input—PG: ≤3.5mA			
INPUT	Low-voltage protection point	75~85Vac, shut down.			
	Low-voltage recovery point	80~90Vac, Auto recovery			
PROTECTION	Over-voltage protection point	280~295Vac, shut down.			
	Over voltage recovery point	275~285Vac, Auto recovery			
	Over Current	36.3~44.55A	24.2~29.7A	18.15~22.3A	
	Over ourient	Protection type: Constant current	auto recovery		
	Over power	871.2~1069.2W	871.2~1069.2W	871.2~1069.2W	
OUTPUT		Protection type: Constant current, auto recovery			
PROTECTION	Over Voltage	27.6~36V	41~45V	55.2~60V	
	Over vellage	Protection type: Constant voltage, auto recovery			
	Over Temperature	105°C±5°C (detect on Mosfet temperature);shut down, auto recovery after the temperature goes down to 75°C			
	Short Circuit	Long-term mode, constant current, auto recovery			
ENVIRONMENT	Operating amb. Temp. & Hum.	-30°C~70°C; 20%~90%RH No condensing (refer to derating curve)			
ENVIRONMENT	Storage Temp. & Hum.	-40°C~85°C; 10%~95%RH No condensing			
SAFETY &EMC (Note 3)	Safety Standards	UL60950-1; EN62368-1			
	Withstand Voltage	Primary-Secondary: 3.0KVac/10mA .Primary-PG:1.5KVac/10mA. Secondary-PG: 0.5KVac/10mA.			
	Isolation Resistance	10M ohms			
	EMI Conduction & Radiation	Compliance to EN55032 Class B			
	Harmonic Current	Compliance to EN61000-3-2,Class D			
	EMS Immunity	Compliance to EN61000-4-2,3,4,5,6,8,11;			
OTHERS	MTBF (MIL-HDBK-217F)	More than 200,000Hrs (25°C, Full load)			

<u>www.powerld.com</u> Tel:+86-755-86051514 Fax:+86-755-86051389 Email: <u>tom@powerld.com</u> Updated on:2021-3-23



NOTE


PDF-800 Series 800Watts Single Output with Active PFC Dimension (L*W*H) 226×116.5×41mm

Packing 12PCS/CTN, 16.8KGS, 0.04CBM Cooling method Forced air cooling (Built-in fan, the fan speed is controlled by load and internal temp.) DC OK 4-6V (when output voltage is normal) All parameters NOT specially mentioned are measured at rated input, rated load and 25°C of ambient temperature.
Measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1 uF & 47uF parallel capacitor.

3. The power supply is considered as a component which will be installed into a final equipment. The final equipment must be re-confirmed that it still meets EMC directives. For guidance on how to perform these EMC tests, please refer to "EMI testing of component power supplies" on http://www.powerld.com.cn.

www.powerld.com Tel:+86-755-86051514 Fax:+86-755-86051389 Email: tom@powerld.com Updated on:2021-3-23



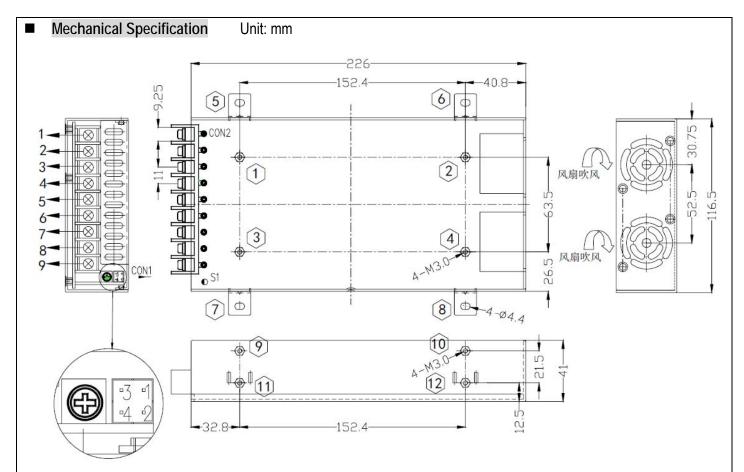


1. Signal connector					
No.	Function	Connector Specs			
1	S+				
2	S-	2000 2*25			
3	DC-OK	- 2008-2*2p -			
4	GND				

2. AC input connector						
No.	Function	Wire specs	Torque max			
1	L					
2	N	22-12AWG	12Kgf.cm			
3	PE					

3. DC output connector					
No.	Function	Wire specs	Torque max		
4/5/6	V+	22-12AWG	12Kgf.cm		
7/8/9	V-	22-12AWG			

■ Block Diagram

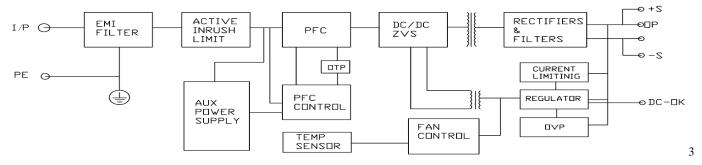





800Watts Single Output with Active PFC


Derating curve

PDF-800-24

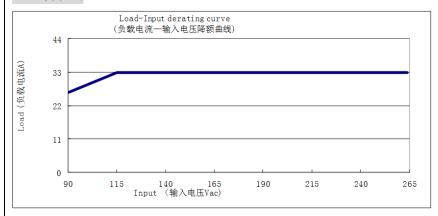

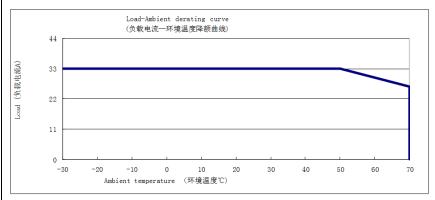


PDF-800-36

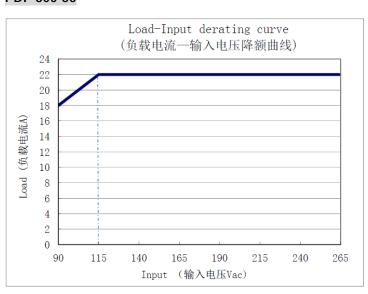


<u>www.powerld.com</u> Tel:+86-755-86051514 Fax:+86-755-86051389 Email: <u>tom@powerld.com</u> Updated on:2021-3-23




POWERLD 800Watts Single Output with Active PFC

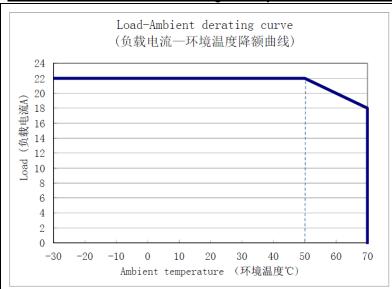

PDF-800-48

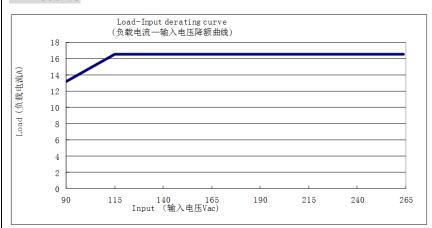

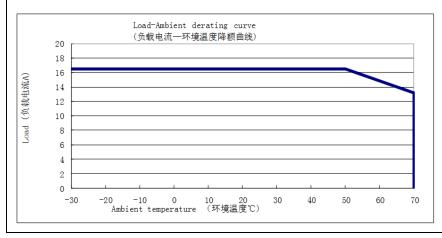

<u>www.powerld.com</u> Tel:+86-755-86051514 Fax:+86-755-86051389 Email: <u>tom@powerld.com</u> Updated on:2021-3-23